


ESC CLUTCH BAR DATASHEET

ESC-15GL CONNECTOR

GLOBAL
PILING
SOLUTIONS

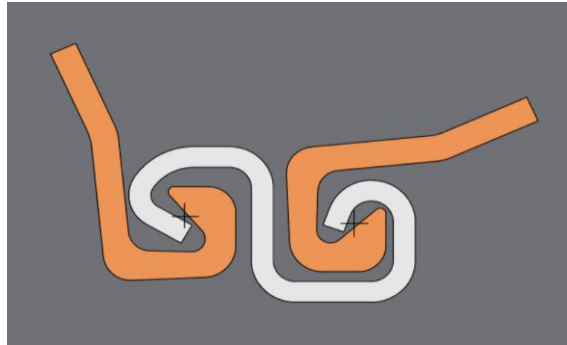

Applications

- Variable sheet pile corner-clutch

Profile Properties

Series	ESC-15GL
Steel Grades	S 355 J0C
Height	ca. 60mm
Width	ca. 107mm
Steel Thickness	8mm
Theoretical weight	14.7kg/m
Possible swing	ca. 40°-148°, varies on pile type
Length	11.9m, 14m, 16m, 18m and 20m

Features

- ESC-15GL clutch-type is suitable for common Larssen U and Z piles as well as some cold formed profiles.
- This clutch type should not be driven single and should be attached to one sheet pile before driving (EN 12063).
- On combination with cold-formed profiles it is importante to observe the correct sequence.
- Produced on CE certified mills.
- All figures are approximate ones and can differ.
- The material thickness may have a tolerance of 1.5mm, twists op to 3mm/m are possible.
- Length tolerance is ± 200 mm.

© Copyright—All Rights Reserved ESC Group
Disclaimer

The information provided within this Guide is for general information purposes only, without any warranty. ESC shall not be held responsible for any errors, omissions or misuse of any of the information provided. ESC disclaims any and all liability resulting from the ability or inability to use the information within this document. Anyone using the information contained does so at their own risk. ESC shall not be held liable for any damages which includes any financial losses or incidental or consequential damages arising from the use of this information. The product range and content contained within is liable to change without notice.

Get in Touch

+852 3956 1868
escglobal@escpile.com
www.escpile.com
GLOBAL PILING SOLUTIONS

ESC App available now
Scan QR Code or search for
"ESC Group" or click on the
links below

