

| | | | |
|-------|----------|------|---------|
| O | | | |
| N | | | |
| M | | | |
| L | | | |
| K | | | |
| J | | | |
| I | | | |
| H | | | |
| G | | | |
| F | | | |
| E | | | |
| D | | | |
| C | | | |
| B | | | |
| A | | | |
| Issue | Revision | Date | Initial |

Notes:

ESC Client:

Project Title:




Drawing Title:
SP-III Steel Sheet Piling

Stamp: _____
Signature: _____

SHOP DRAWING

| | | | |
|--------------------|--------------------|-----------------|------|
| Designed LLL | Drawn LLL | Checked BILL | Rev. |
| Scale 1:10 (A4) | Date 20-12-2012 | Job No. | |

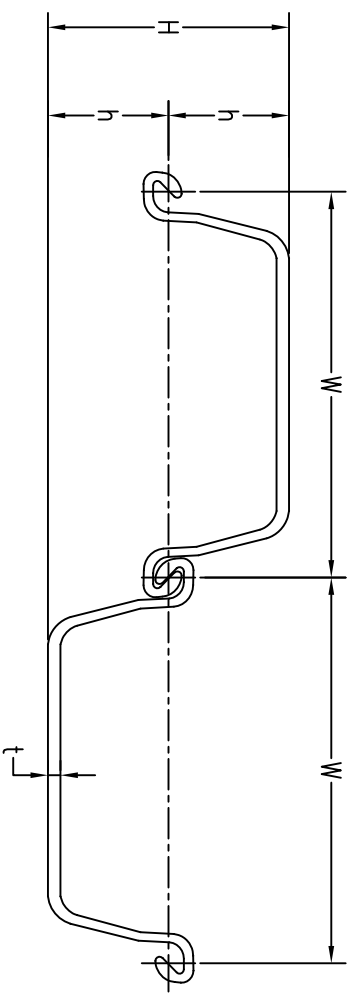

SP-III Steel Sheet Piling

COMBINED PILE PROPERTIES

| SERIES | UNIT WIDTH W [in] (mm) | HEIGHT H [in] (mm) | THICKNESS t [in] (mm) | MASS [lb/ft] (kg/m) | MASS [lb/ft ²] (kg/m ²) | TOTAL MODULUS [in ² /ft] (cm ² /m) | TOTAL MOMENT OF INERTIA [in ⁴ /ft] (cm ⁴ /m) | Coating Area both sides [ft ² /ft] (m ² /m ²) |
|--------|---------------------------------|-----------------------------|--------------------------------|---------------------------|---|---|--|--|
| SP-III | 15.75 (400) | 9.84 (250) | 0.512 (13.0) | 40.32 (60) | 30.71 (150) | 24.92 (1340) | 123.02 (16800) | 3.60 (3.60) |