


ESC-HRZ SERIES

ESC-HRZ JAGGED WALL

Jagged Wall Properties

The ESC-HRZ Series Sheet Pile can be orientated to a jagged wall configuration which is suitable for certain applications. It provides an economic solution for sealing applications—both temporary and permanent. Compared to the normal configuration, the Jagged Wall configuration increases the unit width by 12-16%. It has a reduced height and a low driving resistance.

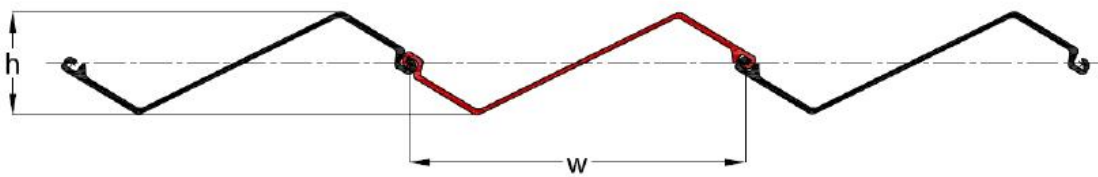

Section	Width (w)	Height	Thickness		Cross Sectional Area	Weight		Elastic Section Modulus	Moment of Inertia	Coating Area (both side per pile)
	mm	mm	Flange (t _f) mm	Web (t _w) mm		Per Pile kg/m	Per Wall kg/m ²			
ESC-HRZ17-630	711	208	8.5	8.5	125.06	69.8	98.17	335	34,881	1.68
ESC-HRZ18-630	711	209	9.5	9.5	136.17	76	106.89	372	38,835	1.68
ESC-HRZ19-630	711	210	10.5	10.5	147.27	82.2	115.61	408	42,796	1.68
ESC-HRZ20-630	711	211	11.0	11.0	153.01	85.4	120.11	424	44,784	1.68
ESC-HRZ24-700	812	243	12.0	9.0	140.41	89.5	110.22	460	55,835	1.93
ESC-HRZ26-700	812	244	13.0	10.0	151.71	96.7	119.09	501	61,078	1.93
ESC-HRZ28-700	812	245	14.0	11.0	163.01	103.9	127.96	542	66,419	1.93

Interlock Configuration



Get in Touch:

T +1 (704) 654 0321
E info@escsteel.com
W www.escsteel.com
COMPLETE PILING SOLUTIONS

ESC App available now
Scan QR Code or search for
"ESC Group" on AppStore &
Google Play

